



SEMI AUTOMATIC SHOTGUN INSTRUCTION MANUAL

READ THE INSTRUCTIONS AND
WARNINGS IN THIS MANUAL
CAREFULLY BEFORE USING THIS FIREARM







GUN SAFETY RULES

Observe these rules of safe gun habdling.

- 1. Always keep the muzzlepointed in a safe direction. Watch the muzzle at all times: never point a gun, accidentally or intentionally, at any person or anything you do not intend to shoot. Identify the target before shooting; do not shoot at sounds.
- 2. Always treat any gun as if it is loaded it may be!
- 3. Keep your finger off the trigger while operating the action and at all other times until you are ready to shoot.
- 4. Keep the safety "on" or in the "safe" position at all times until you are ready to fire the gun. Move to shoot. Up to the previous line after the word intend.

to shoot.

Do not rely on your gun's safety, the safety on any gun is a mechanical device and is not intended as a substitute for common sence or safe gun handling.

- 5. Learn how your gun functions and handles. If you do not thoroughly understand the proper use and cafe of your gun, seek the advice of someone who is knowledgeable.
- 6. Do not alter or modify and parts of a firearm.
- 7. Store guns unloaded, separate from any ammunition, and where children cannot get to them.
- 8. Be sure the barrel is clear of any obstructions before loading. Make it a habit to check the barrel every time before loading.
- 9. Be sure you have and use the proper ammunition. 20 gauge shell will enter a 12 gauge chamber far enough so that a 12 gauge shell can be loaded behind it. Also, a 3 inch shell may fit into a 2 3/4 inch chamber, but the crimp at the mouth of the shell will unfold into the forcing cone. If either of these things occur and you fire the gun, the gun will explode, damaging the gun and possibly causing serious injury or death to you and those around you
- 10. Wear protective shooting glasses and adequate ear protection when shooting.
- 11. Never climb or jump over anything, such as a tree, fence, or ditch, with a loaded gun. Open the barrel, remove the shells, and hand the gun to a friend

or place it on the ground on the other side of the obstacle before crossing it yourself. Do not lean a gun against a tree or other object; it could fall and possibly discharge.

- 12. Do not shoot at a hard surface or at waterBullet and shot can ricochet or bounce off and travel in unpredictable directions with great velocity.
- 13. Never transport a loaded gun. Do not place a loaded gun into a vehicle. The gun shold be unloaded and placed into a case when not in use.
- 14. Never drink alcoholic beverages before or during shooting.

ABOUT YOUR SEMI-AUTOMATIC SHOTGUN

Your shotgun is gas operated. The gas created from firing a live shotshell operates the action. Once the first shell has been fired, the next shell in the magazine will automatically cycle into the chamber, and this cycle will continue (each time the trigger is pulled) until all shells loaded in the magazine have been fired. The bolt will remain locked in the open position after the last shell is fired.

The technologically advanced gas metering system allows you to shoot 23/4" and 3" shells interchangeably with any ammunition of the proper gauge for your shotgun with flawless performance. This and other fine feratures ensure that your shotgun will be a source of pride and pleasure for years to come.

For 3 1/2" models the meterring system allows you to shott heavy 23/4", 3" and 3 1/2" shells interchangeably.

SAFETY SWITCH OR BUTTON

The safety is designed to stop the trigger mechanism.

DON'T RELY ON YOUR GUN'S SAFETY. TREAT EVERY GUN AS IF IT WERE LOADED AND READY TO FIRE. The safety on any gun is a mechanical device, and it is not intended as a substitute for common sense or safe gun handling. Always keep the muzzle pointed in a safe direction.

A. The safety is located behind the trigger, and provides protection against accidental or unintentional discharge under normal usage when properly engaded.

B. To engage the safety, push the button so that it protrudes from the right side of the gun and the RED BAND MARKING CAN NOT BE SEEN. The safety should always be in the "on" or "safe" position until you intend to fire the gun (photo 1).

C. When you are ready to fire the gun, press the safety button to the "off" or "fire" position, so that the safety protrudes from the left side of the gun and the RED BAND MARKING IS SHOWING.



DANGER: The gun will fire when the trigger is pulled intentionally or acciddentally when the RED BAND MARKING IS SHOWING.

ASSEMBLY

In the packing, the shotgun is divided into two parts: receiver and barrel group (photo 2).




To assemble the gun, follow the steps below:


Unscrew the cap (photo 3) and remove the forend (photo 4).

Pull the bolt hanging latch placed on the rear side of the carrier (photo 5).


Assemble the barrel while centering the magazine and the receiver (photo 6).

Reassemble the forend (photo 7) and screw the cap onto the threaded magazine tube (photo 8).

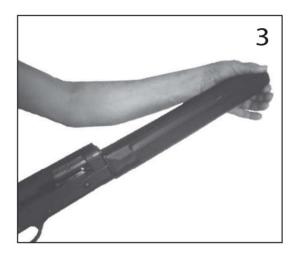


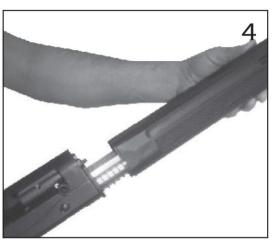



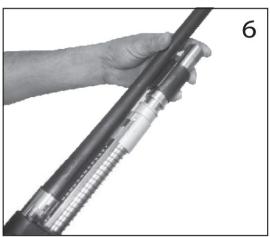



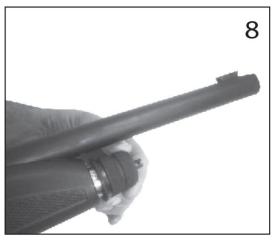

LOADING YOUR SHOTGUN

You can load your shotgun in the following ways:

1. Be certain the safety is in the "on" or "safe" position (see section regarding operation of the safety on pages 3 and 4).


Draw or pull the bolt rearward until it locks in the open position (photo 12). Place a shell into the breach (photo 9). Release the bolt by pressing the button located toward the front of the receiver (photo 10). This chambers a round, and the gun will fire if the trigger is pulled with the safety in the "off" or "fire" position. You can then load additional shells into the magazine by inserting them through the loading port on the bottom of the receiver and pushing them into the magazine (photo11).

2. Be certain the safety is in the "on" or "safe" position (see section regarding operation of the safety on pages 3 and 4).

Draw or pull the bolt rearward until it locks in the open position (photo 12). Load shells into the magazine by inserting them through the loading port on the bottom of the receiver and pushing them into the magazine (photo 11). Push back the magazine shell latch on the rear side of the carrier (photo 13). This allows the shell to exit the magazine and move onto the carrier. Release the bolt by pressing the buttom located toward the front of the receiver (photo 10). This chambers a round, and the gun will fire if the trigger is pulled with the safety in the "off" or "fire" position.






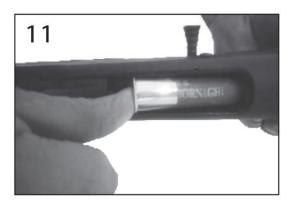

UNLOADING YOUR SHOTGUN

Be cartain the safety is in the "on" or "safe" position (see the section regarding operation of the safety on pages 3 and 4). Repidly draw or pull the bolt reaward to eject any shell in the chamber (photo 12). Lock the bolt open by pressing the button located toward the front of the receiver (photo 13). Lift the carrier and push on the magazine shell latch (photo 14). The shells in the magazine will be ejected.

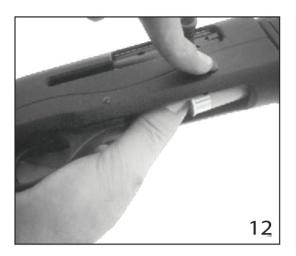






DISASSEMBLY


Unscrew the forend cap.


Take the forend and the barrel off (photo 15).

Take the handle off from the bolt and then all the bolt assembly (photo 16).

With a tool, push the pin(s) of the trigger group out (photo 17) and take the trigger group off (photo 18).

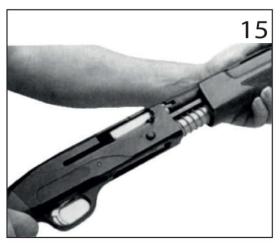

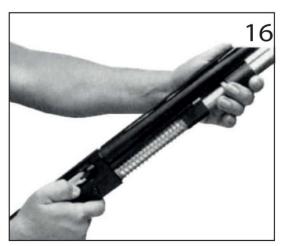

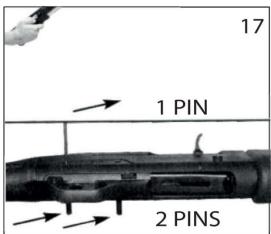




REASSEMBLY

Assemble on the magazine tube, the action spring and insert the bolt group into the receiver.

Insert the handle into its hole.

Reassemble the trigger group fixing it with the pin(s).

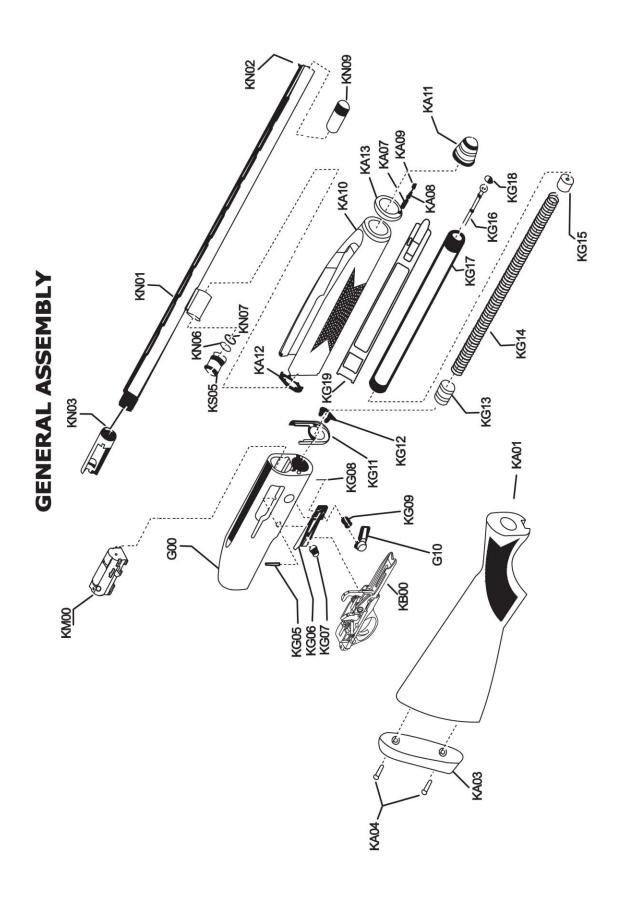


12 GA. GENERAL ASSEMBLY - PART LIST

Stock No Description

Stock No Description


KA07 FORE-END BLOCKER SPRING FORE-END BLOCKER SCREW KA04 RUBBER RCOIL PAD SCREW FORE-END PINNED PLATE SYNTHETIC FORE-END FORE-END BLOCKER WALNUT FORE-END GAS HOLE O-RING FORE-END PLATE GAS HOLE JOINT GAS HOLE PLUG FORE-END NUT **PISTON O-RING** FRONT SIGHT CHOKE TUBE **PISTON RING** BREECH BARREL **PISTON** KA08 KA09 KA10 KSA10 60NX KN10 KS05 KS06 KN03 KA12 KA13 KN02 KN07 KN11 KA11 KN01 **KS07** CARRIER LATCH BUTTUN SPRING KG15 | MAGAZINE SHORT SPRING CUP KG13 | MAGAZINE LOGN SPRING CUP CARRIER LATCH BUTTUN PIN TRIGGER GROUP ASSEMBLY MAGAZINE PLUG BLOCKER FORE-END LATCH SCREW CARRIER LATCH BUTTUN CARRIER LATCH SPRING RECOIL SPRING TUBE RUBBER RECOIL PAD CARRIER LATCH PIN RECOIL SPRING CAP KG14 MAGAZINE SPRING SYNTHETIC STOCK FORE-END LATCH MAGAZINE PLUG CARRIER LATCH MAGAZINE TUBE WALNUT STOCK RECOIL SPRING **ACTION BAR** RECEIVER KG16 KG12 KG05 KG17 KG18 KG19 600 **K**G01 KG03 KG04 909 KG08 609 KG10 KG11 KSA01 **KG07** KA03 800 **KA01**

TRIGGER GROUP ASSEMBLY-B00

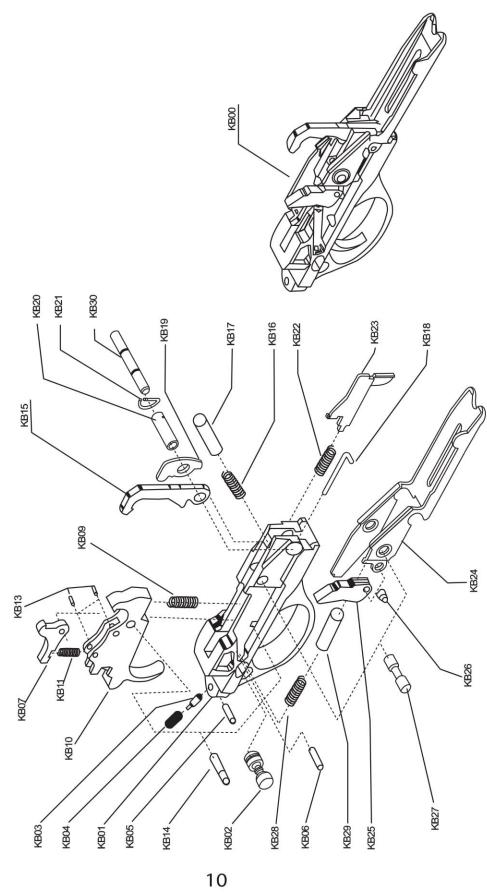

12 GA. TRIGGER GROUP ASSEMBLY - PART LIST

| Stock | Stock No Description | Stock N | Stock No Description |
|-------|-----------------------------|---------|----------------------------|
| KB01 | TRIGGER GUARD | KB17 | HAMMER SPRING CAP |
| KB02 | HAND SAFETY | KB18 | HAMMER LATCH SPINDLE |
| KB03 | SAFERY PLUNGER SPRING PIN | KB19 | HAMMER LATCH |
| KB04 | SAFERY PLUNGER SPRING | KB20 | HAMMER TUBE PIN |
| KB05 | SAFERY SPRING RETAINING PIN | KB21 | HAMMER TUBE PISTON RING |
| KB06 | TRIGGER FIXING PIN | KB22 | TRIGGER GUARD LATCH SPRING |
| KB07 | DISCONNECTOR | KB23 | TRIGGER GUARD LATCH SPRING |
| KB09 | TRIGGER SPRING | KB24 | CARRIER |
| KB10 | TRIGGER | KB25 | BREECH BOLT LATCH |
| KB11 | HAMMER DROP SPRING | KB26 | BREECH BOLT LATCH PIN |
| KB12 | HAMMER DROP PART | KB27 | CARRIER PIN |
| KB13 | HAMMER DROP PIN | KB28 | CARRIER SPRING |
| KB14 | TRIGGER PIN | KB29 | CARRIER SPRING PIN |
| KB15 | HAMMER | KB30 | RECEIVER PIN |
| KB16 | HAMMER SPRING | | |
| | | | |

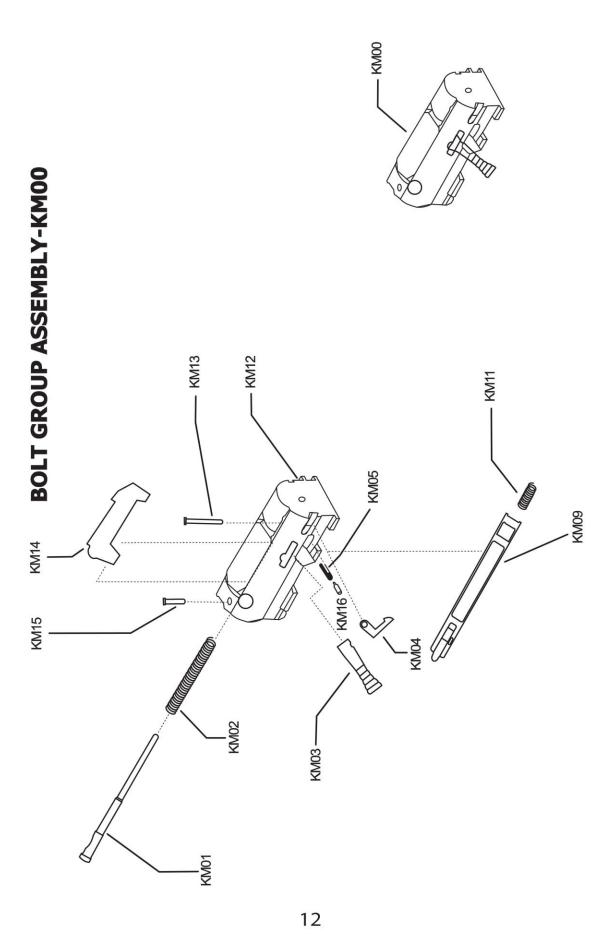


12 GA. BOLT GROUP ASSEMBLY - PART LIST

Stock No Description

| KM01 | FIRINING PIN | |
|-------------|------------------------|--|
| KM02 | IRINING PIN SPRING | |
| KM03 | BOLT HANDLE | |
| KM04 | EXTRACTOR | |
| KM05 | EXTRACTOR SPRING | |
| 90WX | ACTION BAR | |
| KM07 | BOLT HANDLE PIN SPRING | |
| KM08 | BOLT | |
| KM09 | EXTRACTOR PIN | |
| KM10 | LOCKING BLOCK | |
| KM11 | FIRING RET AINING PIN | |
| KM12 | EXTRACTOR SPRING PIN | |
| | | |
| | | |
| | | |
| | | |
| | | |

USAGE OF CHOKE TUBES

The choke is what controls the openness or tightness of the pattern of your shotgun. The chart below lists the choke available (from open to tight), and the corresponding marks that indicate the choke of your specific shotgun.

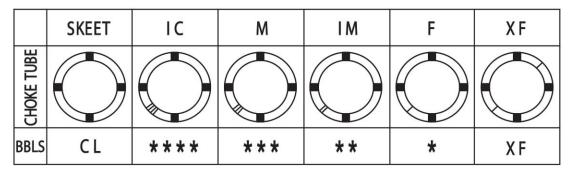

Never fire or run gun cleaning tools through a barrel that uses choke tubes without having a choke tube installed. The threads of the choke tube and the internal threads of the barrel should be cleaned after each use and before installation of the tube.

To install a tube, insert the tube into the barrel and tighten with your fingers. Once the tube is finger tightened, tighten with the appropriate choke-tube wrench until the tube is snug. DO NOT over tighten or forcefully tighten with wrench.

MAINTENANCE AND CLEANING

Caution: Make sure the gun is unloaded.

- 1. Make sure that the broad, polished, finely fitted mating surfaces of the breech block and receiver are especially clean and lightly oiled with a high quality gun oil. Do not use pure silicone or lanolin.
- 2. Run an oil patch through the bore with a cleaning rod starting from the breech end. To prevent leading, use a cleaning solvent and brass brush to clean the bore periodically. Follow this cleaning with one or two clean oilpatches. Important: If your gun is equipped with choke tubes, do not use a brass brush to clean the barrels unless a choke tube is installed in each barrel. Barrels that utilize choke tubes must also have the choke tubes removed to clean and oil the threads inside the barrel and the choke tubes themselves. This will protect the threads from being damaged by cleaning tools and also prevent a dirt build up that would cause the choke tube to become difficult to remove from the barrel. Damage can result to choke tubes and barrel when attempting to remove sticky choke tubes.

Never fire your gun without choke tubes snuggly tightened in barrels. Do not over tighten choke tubes. Wipe all exposed metal surfaces with an oiled cloth before storing. Do not squirt or pour oil into the inside mechanism because it may

hamper proper functioning and will soak the wood. After extended periods of heavy use, your gun sholud be taken to a qualified gunsmith to have the action disassembled for professional cleaning and lubrication.

3. Care for your wood stock and forearem the same way you would a piece of furniture with the same finish.

STORAGE

Clean thoroughly and oil your gun before storage. Store the gun in a case to prevent scratches and dents. Store in a dry place to prevent corrosion. Store the gun away from children and in place where it cannot be obtained by those unauthorized to use it. Always store gun unloaded and separately from any ammunition.

IMPORTANT

USAGE OF STEEL SHOT

The choke (bore constriction) in all modern shotguns has been established based on the pattern performance of shot shells loaded with lead shot. When using the steel shot shells, you will notice a different performance in pattern density versus the established lead shot pattern, because the steel shot is harder and lighter than lead shot.

You should be aware of the following differences and cautions: Never shoot steel shot loads in a full choked barrel or full choke tubed barrel. To do so may cause the barrel to swell or rupture. In general, steel shot fired with a modified choke will produce the equivalent of a lead full choke pattern. This will be true of all steel shot sizes up to and including no. 2. The established improved cylinder chokes will produce the equivalent of a (lead) modified choke pattern.

All steel shot sized larger than no. 2, and including special sized such as -F-, "T", etc., should be used only with improved cylinder chokes. These steel shot sized, when used in improved cylinder chokes, will produce patterns equivalent to (lead) full choke patterns. The established cylinder choke or bore will produce the equivalent of a modified (lead) pattern.

Additional information concerning the use of steel shot is available from the best ammunition companies.

PARTS

To order parts, please furnish the following information: Your name, address, telephone number, firearm serial number, maker and model. When we receive your request we will send you an order from and a parts breakdown with prices.

WARRANTY CARD

| PURCHASE | R | | | |
|-------------|-------------|----------|-----|--|
| Street | | | | |
| City | | State | Zip | |
| Phone | | | | |
| Purchase Da | ate | | | |
| PRODUCT: | ModeL Gauge | Serial # | | |
| SIGNATURE | | | | |

Please sign and return this card to validate warranty

BE COURTEOUS

When shooting or hunting always acquire the permission of the landowner.

Respect the land. Don't litter the area. Drive vehicles only where advance permission has been granted and always express gratitude for use of another person land. Remember you are helping and developing a reputation for all sportsmen/sportswomen.



BATMAZ GROUP DİŞ TİCARET VE PAZARLAMA

Address: Yeni Mah. 40657. Sok. No 29/4 Beyşehir, Konya TURKEY

Web: https://www.batmazgroup.com/

Email: export@batmazgroup.com